


Neoprene 150

CR/SBR

Product features

- CR/SBR, black
- Good quality for reasonable price
- Both sides smooth

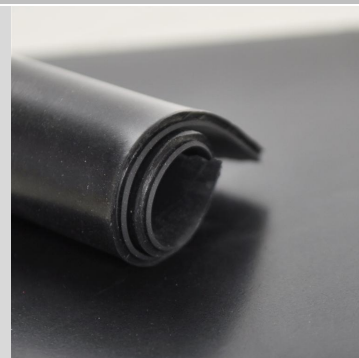

Product specifications

• Colour	Black
• S.G. grs/cm ³	1.40
• Hardness ° Shore A ± 5° (DIN 53519)	65
• Tensile strength MPa (DIN 53504)	5
• Elongation % (DIN 53504)	300
• Abrasion Resistance mm ³ (DIN 53516)	-
• Compression set % (ISO 815) 24h/70°C max %	40
• Tear Strength kN/m (DIN 53507)	-
• Temperature °C	-20/+80
• Change of volume <ul style="list-style-type: none"> ○ Oil ASTM nr 5 (72H/70°C) 	-

○ Oil IRM 903 (72H/70°C)	-
• After ageing	
○ Hardness ° Shore A (72H/70°)	-
○ Tensile strength (72H/70°C)	-
○ Elongation (72H/70°C)	-
• Resistance to	
○ Ozone	Satisfactory
○ Diluted acids	Good
○ Concentrated acids	Satisfactory
○ Oil	Satisfactory
○ Solvents	Satisfactory

Product versions

Colour	Thickness/ mm	Width / m	Length / m	Insertions
Black	1	1.40	20	0
Black	1.5	1.40	15	0
Black	2	1.40	10	0
Black	2	1.40	10	1
Black	3	1.40	10	0
Black	3	1.40	10	1
Black	3	1.40	10	2
Black	4	1.40	10	0
Black	4	1.40	10	1

Sheeting

Black	4	1.40	10	2
Black	5	1.40	10	0
Black	5	1.40	10	1
Black	5	1.40	10	2
Black	6	1.40	10	0
Black	6	1.40	10	2
Black	8	1.40	5	0
Black	8	1.40	5	2
Black	10	1.40	5	0
Black	10	1.40	5	2
Black	12	1.40	5	0
Black	15	1.40	5	0
Black	20	1.40	5	0