



Airos Eco Tower

Slim, modern style with high range

CASAFAN



COMMERCIAL USE
Certified in accordance with Machinery Directive 2006/42/EC, part 1 for commercial use.

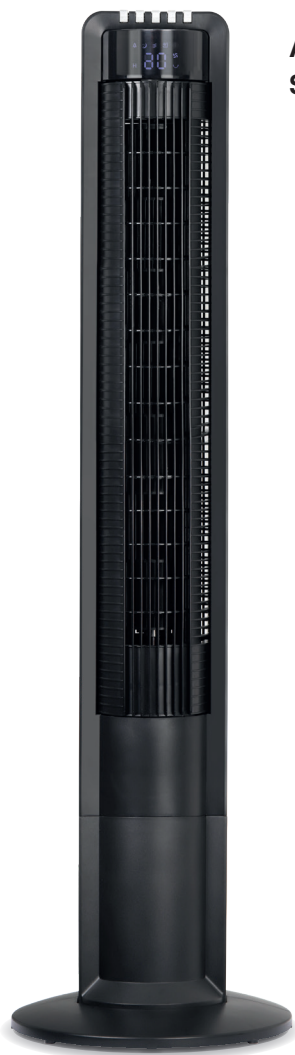

Airos Eco Tower SW #67542

All functions are switchable on the device and via the infrared remote control.



- Elegant, compact housing made of shockproof, thermoplastic ABS resin.
- 12 speed settings.
- Timer up to 12 hours switch off delay.
- Three natural modes for continuously varying airflow.
- Storage for remote control in the fan head.
- Discreetly illuminated display (can be switched off) shows the functions that are activated.
- Specially developed tangential blade for low noise with maximum air performance – range up to 8 m.
- Stable, anti-tip base.
- Internal 90°-oscillation evenly distributes the airflow around the room.
- 2,4 m power cord with Euro flat plug.
- Practical handle integrated into the reverse side of the housing.

Product	Code No.	Colour
AIROS ECO TOWER SW	67542	Anthracite/black
AIROS ECO TOWER WE	67543	White

Technical details		Dimensiones (mm)	
Power motor (W)	30 max.		Exhaust grille 550 x 80 mm
Voltage (V/Hz)	220-240/~50		
No. of speeds	12		
Rpm min ⁻¹	1.460 max.		
Oscillation (°)	90 intern		
Wight (kg)	3.7		
Sound pressure (L _p -3m) dB(A)	41.5		
Sound power (L _w) dB(A)	59.0		
Airflow max. (m ³ /h)*	2,052		
Service value (m ³ /min/W)	1.1		

Ambient temperatur -10 bis <+40 °C.

*measured in accordance with ISO 5801

Airos Eco Tower WE #67543

