




Stair nosings significantly reduce the risk of accidents while also protecting the staircase from external wear and impact in demanding environments.

# SN-110

## PHOTOLUMINESCENT FIBERGLASS STAIR NOSINGS

- ✓ Slip resistance class R13.
- ✓ Silicon carbide grit – hardness 9.3.
- ✓ UV- and chemical-resistant.




### PHOTOLUMINESCENT CONTRAST IN STAIRS

Corrosion-free stair nosings that effectively protect against slipping accidents while enhancing safety during emergency evacuation. The profiles are manufactured from fiberglass with silicon carbide grit, providing a highly durable and slip-resistant solution designed for demanding environments such as industrial facilities, offshore applications, and marine installations.

The stair nosings are surface-treated with a photoluminescent two-component epoxy resin system that is charged by ambient light and emits a clear glow in darkness for up to 35 hours. This creates strong visual contrast at the front edge of each stair tread and facilitates orientation during power outages, smoke development, or other situations with reduced visibility.

### READY-TO-INSTALL PROFILES

The profiles are available in standard lengths of 1,000 or 2,400 mm, but can also be supplied ready for installation to exact dimensions. They are easily installed using adhesive, screws, or clips directly onto existing stairs, regardless of material or substrate. No curing time is required, allowing immediate use after installation—minimising downtime and simplifying installation.

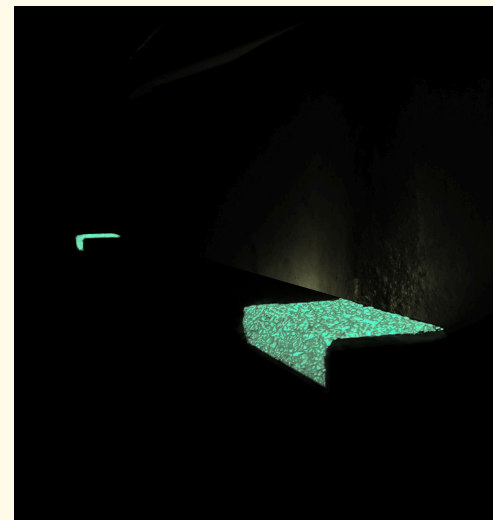

### TECHNICAL INFO



Product name	SN-110 – Heavy Duty
Art. no	See <a href="http://www.safestep.fi">www.safestep.fi</a>
Dimensions	1 000 x 76 x 25 mm 2 400 x 76 x 25 mm
Thickness	4 mm
Weight	0.7 kg/lpm
Material	Fiberglass, silicon carbide
Mfd. acc. to	ISO 9001 & ISO 14001
Installation	Adhesive, screws, or clip
Clips	See our range