




High-quality escape route markings can be crucial in an emergency situation and should be installed on both sides of each stair tread.

GL-222

PHOTOLUMINESCENT CONTRAST MARKER

- ✓ Escape route marking for stairs.
- ✓ Photoluminescent classification according to ISO 17398.
- ✓ Class D.




PHOTOLUMINESCENT SAFETY

A photoluminescent stair marking installed along the outer edge of the stair tread to provide clear and effective guidance during emergency evacuation. The angled nosing ensures the marking is clearly visible from both above and below, improving orientation in staircases during power outages, smoke development, or other situations with reduced visibility. The slip-resistant surface combined with a durable ceramic coating makes the product particularly suitable for areas exposed to heavy loads and intensive traffic.

SIMPLE YET EFFECTIVE

The profile features a foam backing with a self-adhesive 3M surface, enabling quick and easy installation. The short charging time ensures the product is rapidly ready for use, while the photoluminescent effect emits a clear and long-lasting glow in darkness for up to 68 hours. A reliable solution for enhanced stair safety in public environments, industrial facilities, and other safety-critical areas.

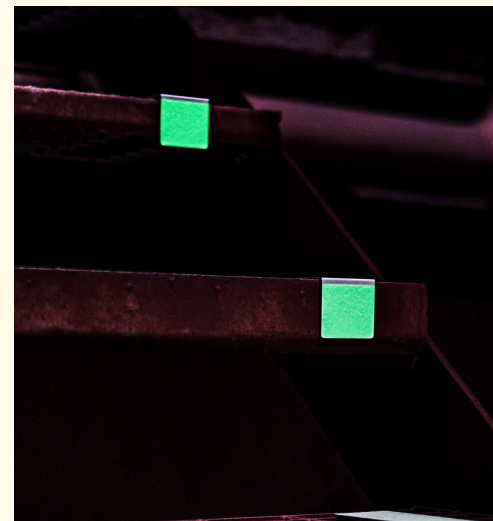

TECHNICAL INFO



Product name	GL-222
Art. no	See www.anti-slip.com
Dimensions	200x50x45 mm
Thickness	3 mm
Photoluminescent performance	Class D
Installation	3M-tape