


# PRODUCT DATASHEET

<b>Article Name</b>	baseline
<b>Article No.</b>	1241/0003
<b>Dimensions (mm)</b>	
Overall length	398,5 ±1,5 mm
Overall width	299 ±1,0 mm
Overall height	120 ±0,4 mm
Stacking height	110 ±0,4 mm
Total inner height	117,6 ±0,4 mm
Usable inner height	107,6 ±0,4 mm
Length bottom frame	362,1 ±1,5 mm
Width bottom frame	263,1 ±1,0 mm
Inner length (top)	367,5 ±1,5 mm
Inner width (top)	268 ±1,0 mm
Inner length (min)	355,9 ±1,5 mm
Inner width (min)	256,6 ±1,0 mm

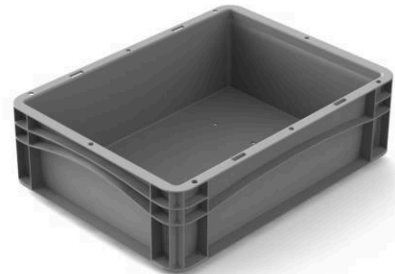

<b>Weight and Volume</b>	
Weight	690 ±10 g
Volume	11,2 L

<b>Loads and Temperatures</b>	
Stacking load 23°C (static)	250 kg
Loading capacity EN 13117	20 kg
Temp. resist short	-20 / +80 °C
Temp. resist long duration	-20 / +40 °C

**Options**  
Base Type: Smooth Base

Deflection depending on support and temperature

