

Product Datasheet model uvex ultravision 9301 105

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,
D-90766 Fürth**

1. Product Characteristics

- classic safety goggle suitable for a wide range of applications
- flexible face seal naturally moulds to any facial shape
- generous internal volume accommodating prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- indirect ventilation system increases air circulation
- length-adjustable textile headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

2. Technical Details Body

Frame

| | |
|----------|----------------------|
| Material | PVC |
| Version | indirect ventilation |
| Colour | transparent grey |

Headband

| | |
|----------|-------------------------|
| Material | synthetic |
| Features | individually adjustable |
| Colour | anthracite, blue |


Headband Hooks

| | |
|----------|------------|
| Material | PC |
| Colour | anthracite |

Marking

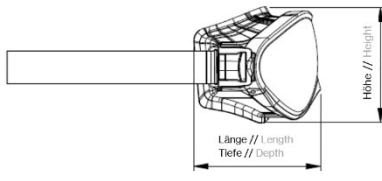
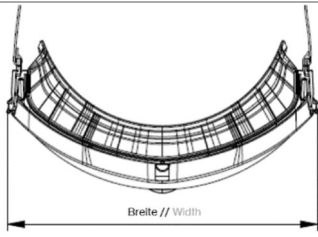
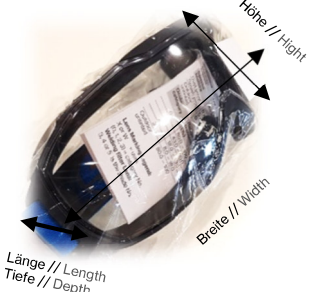
| | |
|---|--|
| Manufacturer 's ID code | W |
| Applicable EN norm | 166 |
| Field of use | 3 (drops and splashes of liquid) 4 (large dust particles) |
| Impact resistance | B (120 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Conformity symbol | CE |

3. Technical Details Lens

| | |
|---|---|
| Material | PC |
| Thickness | 2.2 mm at PD |
| Coating | uvex supravision excellence |
| Colour | clear |
| UV protection | UV400 |
| Replacement lens | 9301255 |
| Marking | |
| Filter | 2C-1.2 (EN 170) |
| Manufacturer 's ID code | W |
| Optical class | 1 |
| Impact resistance | B (120 m/s) |
| Resistance to high speed particles at extremes of temperature | T |
| Scratch resistance | K |
| Antifog | N |
| Conformity symbol | CE |
| Factory symbol |  |

4. Logistical Information

Product

| | | |
|---|---|-----------------------|
| Weight | 131g | |
| Dimensions (L x W x B) in approx. mm |   <p style="text-align: right; font-size: small;">picture only for reference</p> | |
| | 95 x 196 x 91 | |
| | Packing unit 1 | Packing unit 2 |
| EAN Code | 4031101067742 | 4031101711133 |
| Quantity in pcs. | 1 | 90 |
| Dimensions (L x W x H) in approx. mm |  <p style="text-align: center; font-size: small;">picture only for reference</p> | |
| | 100 x 200 x 91 | 600 x 400 x 400 |
| Net weight in approx. g | 131 | 11,790 |
| Gross weight in approx. g | 149 | 14,310 |
| Country of Origin | Czech Republic | |

5. Miscellaneous

| | |
|--------------|-----------------|
| Standards | EN 166 + EN 170 |
| PPE Category | Category II |